


Our GRP Grating is a specially designed moulded non-slip composite floor grating, constructed from glass reinforced fibreglass making it lightweight, chemical, rust, and corrosion resistant whilst also offering longevity and durability. With limited tooling and installation costs, we can offer a vast range of standard length and width sizes, plus our in-house cutting service means we can offer bespoke sizes for that perfect fit.

Available in 25mm and 38mm thickness and an array of colours. Optional clips are available to purchase if required.

Features

- ◆ **Typical applications:** Perfect solution for platforms, walkways, flooring, ramps and covers for industrial or construction sites, chemical and shipping industries as well as offshore oil rigs.
- ◆ **Material:** GRP - Glass reinforced polyester with a resin coated gritted surface.
- ◆ **Cleaning:** Use of a stiff brush will normally be sufficient to remove everyday dirt and debris, and for more stubborn dirt a mild detergent with warm water is often effective. A pressure washer on a low pressure setting can be used to clean the GRP.
- ◆ **Warranty:** Lifetime.

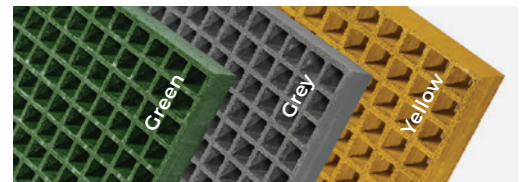

Technical Specification

Slip resistant:	Excellent slip resistance to level 3
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Chemical resistant:	Yes
Cut to size:	Yes, tolerance +/- 3mm
Disability friendly:	Yes, the low profile makes it suitable for wheelchair users
Dry area:	Yes
Wet area:	Yes
Oily and greasy area:	Yes
Heavy area:	Yes
Wheeled area:	Yes

Please note, cutting tolerance +/- 3%

Technical Specification

Environment: Suitable for indoor and outdoor use

Flame retardant: Yes

Impact resistant: Yes

Non-conductive (Electrical): Yes

Non-conductive (HV Electrical): Yes

- Product testing:
- ◆ Slip resistance
 - ◆ Tested to BS7976.2 - PTV 'Extremely Low' for wet and dry conditions, PTV 'Low' for oily and greasy conditions
 - ◆ Coefficient of Friction (CoF): Dry 72; Wet 68 and Oil 63
 - ◆ Fire certificate
 - ◆ Standard ISO Resin - BS 476 Part 7 Class 2*
 - ◆ ASTM-E84 Flame Spread 25, Smoke Density 325
 - ◆ Load certificate
 - ◆ BS EN124 - Class A15
 - ◆ UV certificate
 - ◆ UV Weather ISO 4892-2 Xenon Arc 5000hrs

Temperature resistance: -50°C to +110°C

UV Resistant: Yes

Cleaning: Using a stiff brush will normally be sufficient to remove everyday dirt and debris. For more stubborn dirt, wash with warm water and a mild detergent, or a pressure washer on a low-pressure setting can also be used

Pendulum Slip Testing

The pendulum slip testing was carried out on 17.02.23 and concluded that our GRP Grating achieved the highest slip resistant classification of 'Extremely Low' pedestrian slip risk for wet and dry conditions and 'Low' for oily/greasy areas.

Pendulum Test Value (PTV)	Slip Risk
0 - 24	High
25 - 35	Moderate
36 - 64	Low
65+	Extremely Low

Pendulum test rests	Coefficient of Friction (CoF)		
	Dry	Wet	Oil
Standard Grit	72	68	63

GRP Care and Maintenance

◆ Cleaning

Being a highly durable material, using a stiff brush will normally be sufficient to remove everyday dirt and debris, and for more stubborn dirt, wash with warm water and a mild detergent. A pressure washer on a low-pressure setting can also be used, however, care should be taken to ensure that this does not harm the integrity of the fixings being used, likely to be screws and/or adhesive.

We recommend always testing any cleaning method and liquids on a small inconspicuous section before applying to the full area. Any spills should be cleaned immediately in line with the product data sheets and the company's own safety procedures.

◆ General Routine Maintenance

The integrity of all fixings should be checked on a regular basis to ensure that the grating remain in a firm and stable position. The gritted surfaces and GRP substrate should also be checked regularly, the frequency would depend on the nature and volume of footfall. As a guide, for high traffic areas a monthly inspection would be advisable.

◆ Life expectancy

Our GRP Grating have a design life of 10+ years, however, the life expectancy of any flooring product will be dictated by the nature and volume of the traffic it receives. Factors such as footwear type and material, weight of individual, pedestrian or non-pedestrian traffic, and any contamination such as dirt or grit are all factors that will influence the life term through natural wear and tear of the GRP.

Installation

◆ Handling

Safe handling practices should always be employed. GRP should also be stored face down to prevent damage.

◆ Cutting

Minor adjustments, small cut outs, can be made with a hacksaw or a jigsaw with a suitable blade. We offer a full in-house cutting service, however, should you wish to cut the grating yourself, this is easily to do by using orbital cutting equipment with either a stone or diamond blade. Cutting should be carried out externally, or where there is dust extraction, or suitable ventilation. Appropriate protective equipment should always be worn.

Fixing and Preparation

Please refer to our Installation and Maintenance Guide for further details.

We're here to help

Should you have any questions about our GRP Grating, or need advice regarding care, maintenance or installation, we're only a phone call away.

GRP Chemical Resistance Chart


Environment	%Conc.	Max.Oper. Temp.F/C.
Acetic Acid	50	125/52
Aluminum Hydroxide	100	160/71
Ammonium Chloride	ALL	170/77
Ammonium Bicarbonate	15	125/52
Ammonium Hydroxide	28	N/R
Ammonium Sulfate	ALL	170/77
Benzene	ALL	N/R
Benzoic Acid	SAT	150/66
Borax	SAT	170/77
Calcium Carbonate	ALL	170/77
Calcium Nitrate	ALL	180/82
Carbon Tetrachloride	100	N/R
Chlorine Dry Gas	-	140/60
Chlorine Water	SAT	80/27
Chromic Acid	5	70/21
Citric Acid	ALL	170/77
Copper Chloride	ALL	170/77
Copper Cyanide	ALL	170/77
Copper Nitrate	ALL	170/77
Ethanol	50	75/24
Ethylene Glycol	100	90/32
Ferrous Chloride	ALL	170/77
Formaldehyde	50	75/24
Glucose	100	170/77
Gasoline	100	80/27
Glycerin	100	150/66
Hydrobromic Acid	50	120/49
Hydrochloric Acid	37	75/24
Hydrogen Peroxide	5	100/38
Lactic Acid	ALL	170/77

Environment	%Conc.	Max.Oper. Temp.F/C.
Lithium Chloride	SAT	150/66
Magnesium Chloride	ALL	170/77
Magnesium Nitrate	ALL	140/60
Magnesium Sulfate	ALL	170/77
Mercuric Chloride	100	150/66
Mercurous Chloride	ALL	140/60
Nickel Chloride	ALL	170/77
Nickel Sulfate	ALL	170/77
Nitric Acid	20	70/21
Oxalic Acid	ALL	75/24
Perchloric Acid	10	N/R
Phosphoric Acid	100	120/49
Potass.Chloride	ALL	170/77
Potassium Dichromate	ALL	170/77
Potassium Sulfate	ALL	170/77
Propylene Glycol	ALL	170/77
Sodium Acetate	ALL	160/71
Sodium Bisulfate	ALL	170/77
Sodium Bromide	ALL	170/77
Sodium Cyanide	ALL	170/77
Sodium Hydroxide	N/R	N/R
Sodium Nitrate	ALL	170/77
Sodium Sulfate	ALL	170/77
Stannic Chloride	ALL	160/71
Sulfuric Acid	25	75/24
Tartaric Acid	ALL	170/77
Vinegar	100	170/77
Water Distilled	100	170/77
Zinc Nitrate	ALL	170/77
Zinc Sulfate	ALL	170/77

Closed Edge Sizes

32mm x 32mm internal, applicable to both 25mm and 38mm grating

44.1mm	653.7mm	1263.3mm	1872.9mm	2482.5mm	3092.1mm
82.2mm	691.8mm	1301.4mm	1911.0mm	2520.6mm	3130.2mm
120.3mm	729.9mm	1339.5mm	1949.1mm	2558.7mm	3168.3mm
158.4mm	768.0mm	1377.6mm	1987.2mm	2596.8mm	3206.4mm
196.5mm	806.1mm	1415.7mm	2025.3mm	2634.9mm	3244.5mm
234.6mm	844.2mm	1453.8mm	2063.4mm	2673.0mm	3282.6mm
272.7mm	882.3mm	1491.9mm	2101.5mm	2711.1mm	3320.7mm
310.8mm	920.4mm	1530.0mm	2139.6mm	2749.2mm	3358.8mm
348.9mm	958.5mm	1568.1mm	2177.7mm	2787.3mm	3396.9mm
387.0mm	996.6mm	1606.2mm	2215.8mm	2825.4mm	3435.0mm
425.1mm	1034.7mm	1644.3mm	2253.9mm	2863.5mm	3473.1mm
463.2mm	1072.8mm	1682.4mm	2292.0mm	2901.6mm	3511.2mm
501.3mm	1110.9mm	1720.5mm	2330.1mm	2939.7mm	3549.3mm
539.4mm	1149.0mm	1758.6mm	2368.2mm	2977.8mm	3587.4mm
577.5mm	1187.1mm	1796.7mm	2406.3mm	3015.9mm	3625.5mm
615.6mm	1225.2mm	1834.8mm	2444.4mm	3054.0mm	3663.6mm

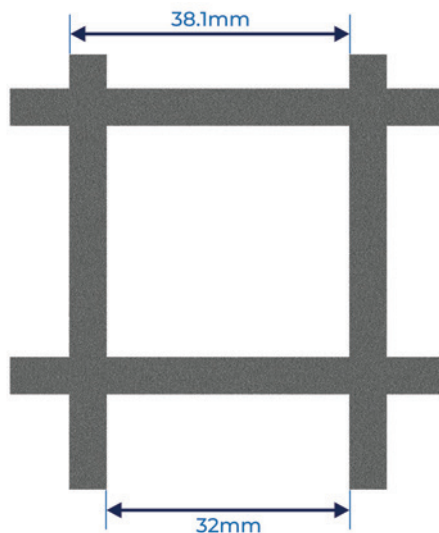

Load Bearing Specification

Load bearing capacity and panel deflection depend on panel thickness and unsupported span.

Standard Mesh Grating - Load and Deflection (Kg/metre @ 1% Deflection)

Panel Thickness (mm)	Span Type of Loading	250mm	500mm	600mm	750mm	1000mm	1200mm	1500mm	2000mm
25	Point Load	1,585kg	464kg	322kg	206kg	116kg	80kg	51kg	29kg
	UDL	2,751kg	1,375kg	850kg	435kg	184kg	106kg	54kg	23kg
38	Point Load	3,814kg	1,698kg	1,179kg	755kg	424kg	294kg	188kg	106kg
	UDL	7,629kg	3,814kg	3,179kg	1,834kg	774kg	448kg	229kg	97kg